

Environmentally friendly photosensitive sensor

Product specifications

Customer	
Date	
Model	LLS05-H ML
Product number	

Make	
Approval	
Customer Signatures	

Sales center
5109 T3 32
Address: 32nd Floor,Tower T3,One Excellence,No.5109Menghai Avenue,Nanshan District, Shenzhen, China
Website www.nysenba.com
Tel 86-755-82594756 18929323299
Fax 86-755-82594762



Product function

1.

(CdS)

ROHS
- Replace Photoresistors(Cds),RoHS Compliance/Pb-free/Cd-free.
2.

LCD
- adjust background light automatically,LCD,mobile phone,camera,Computer Camera etc.
3.
- Suitable for all kinds of light control products and light control toys,such as night lamp etc.
4.
- Applicable to all kinds of infrared monitoring products



Product Features

1.

520nm
- Peak sensitive wavelength 520nm
2.
- Low Power Consumption
3.
- High reliability
4.
- Perfect consistency, completely solve the problems of early start or poor consistency of the lamp.
5.

+85

/65%



1000H
- Fast response, stable performance, no drift at 1000h starting point under + 85 / 65% humidity condition
6.
- Size customized, easy for Installation.




Product Dimensions

[illegible]

Reference circuit

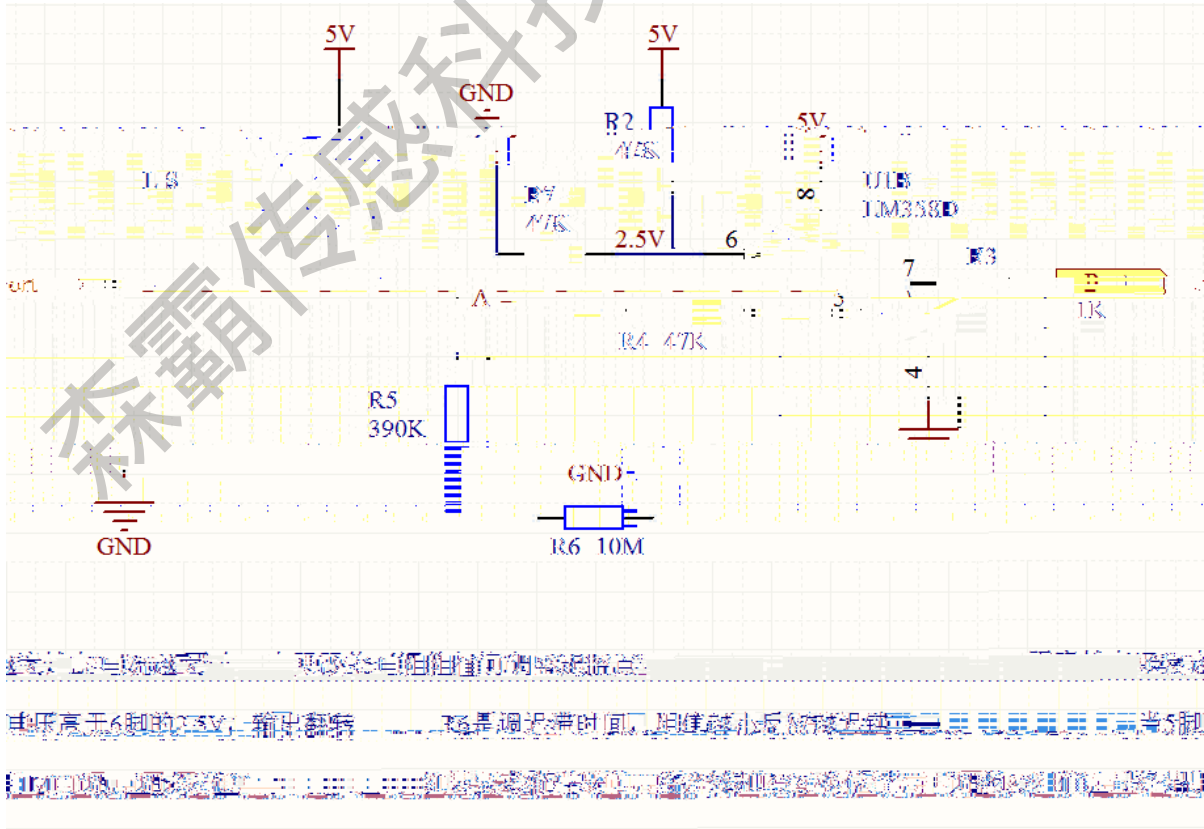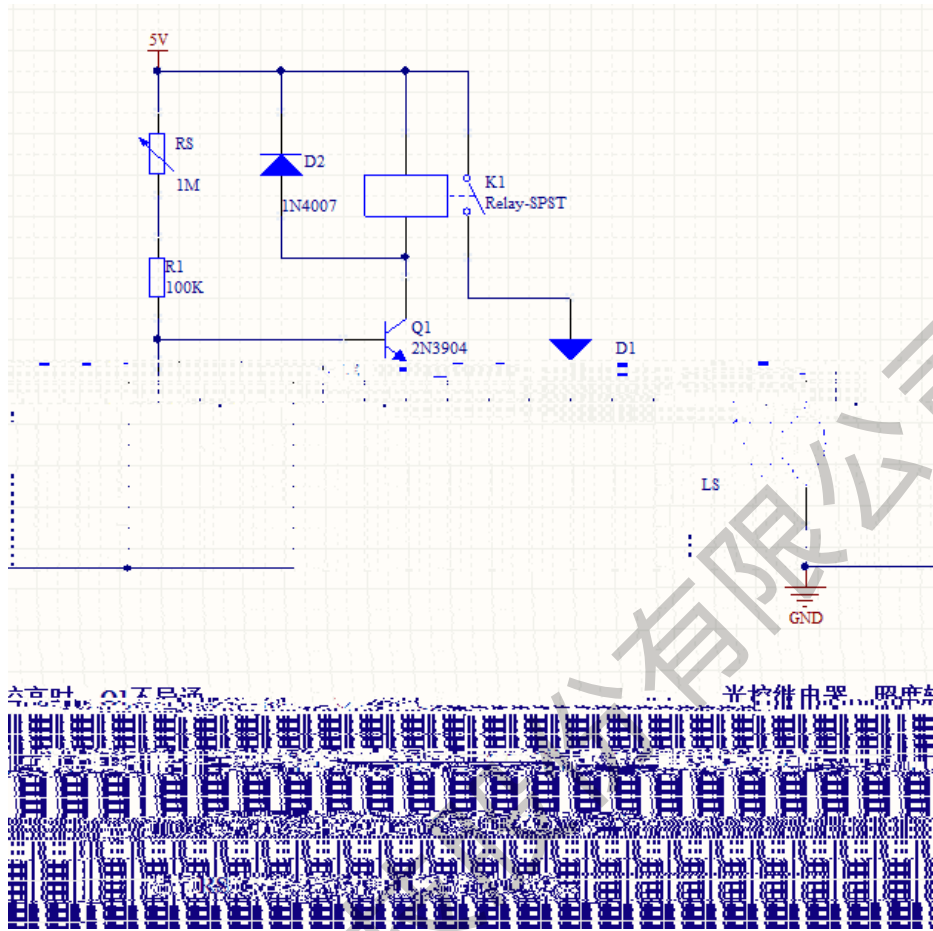


Typical photoelectric characteristics curves

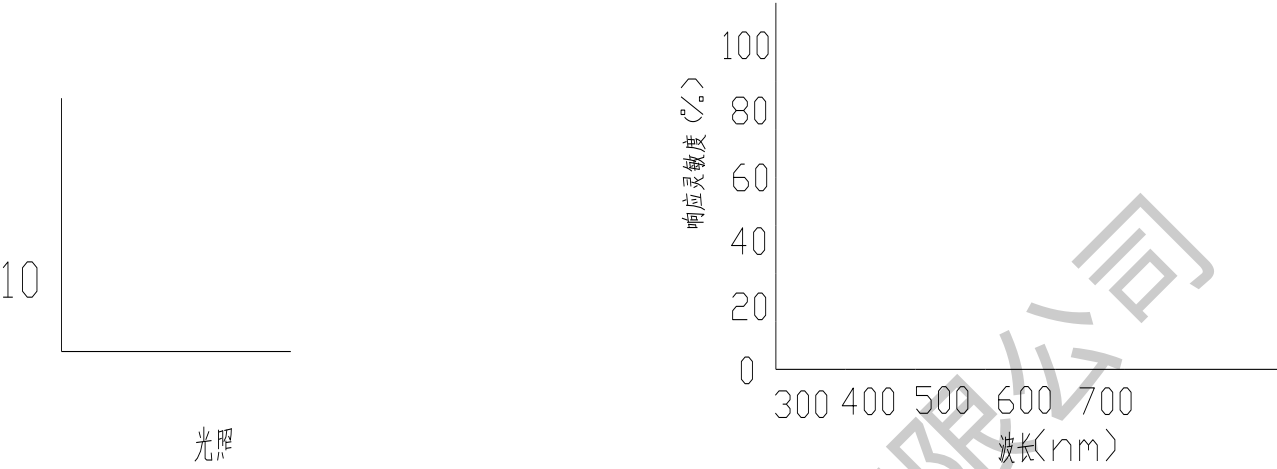


Change of illuminance and photocurrent

Photowavelength map

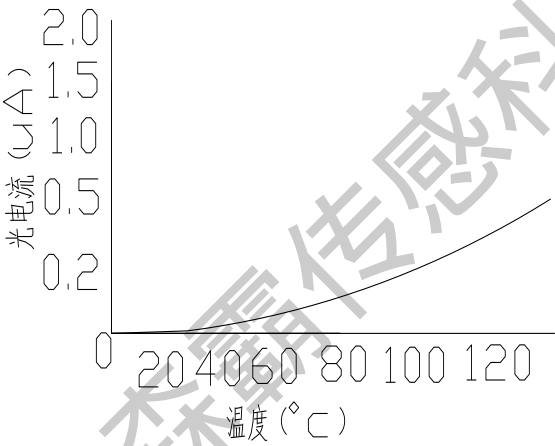

Temperature and photocurrent diagram

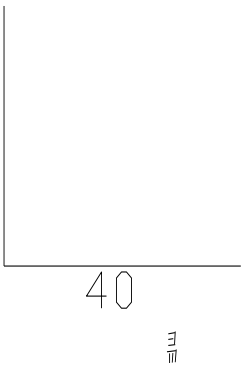

Temperature and dark current diagram

Recommended Soldering Conditions

Mode		Condition
Manually Soldering	Soldering Iron Temperature	340 01605ENC5V3E Max340 (power:60Wmax)
	Soldering Time	01605ENC5V3E 3 MiRinT/F1 12.00 seconds 1 314.829907 635.500
	Soldering Position	1.5mm 1.5

■ Precautions				
1.	0	+30℃	70%	3
The storage conditions of the product after leaving the factory shall be 0 to + 30 ° C, the relative humidity shall not be more than 70%, and the storage period shall be 3 months. If the storage period is more than 3 months, the product shall be placed in a closed container with nitrogen or desiccant, and the storage period may be up to one year				
2.				0 +30℃
Once the package is opened, the products should be used up as soon as possible . If it is not used up,It should be sealed immediately. The storage condition is 0 +30℃, and the relative humidity ≤ 60%. It should be used up within one week				
3.				