

Environmentally friendly photosensitive sensor

Product specifications

Customer	
Date	
Model	LLS03-D ML
Product number	

Make	
Approval	
Customer Signatures	

Sales center
5109 T3 32
Address: 32nd Floor,Tower T3,One Excellence,No.5109Menghai Avenue,Nanshan District, Shenzhen, China
Website www.nysenba.com
Tel 86-755-82594756 18929323299
Fax 86-755-82594762




Product function

1. (CdS) ROHS
Replace Photoresistors(Cds),RoHS Compliance/Pb-free/Cd-free.
2. LCD
adjust background light automatically,LCD,mobile phone,camera,Computer Camera etc.
3.
Suitable for all kinds of light control products and light control toys,




Product Dimensions





■	Ta=25 MAXIMUM RATING (TA = 25 ° C)			
	Parameter name	Symbol	Rating	Unit
	- Collector-Emitter Voltage	V _{CEO}	20	V
	- Emitter-Collector Voltage	V _{ECO}	5	V
	Consumption	P _c	70	mW
	Working temperature	T _{opr}	-25 85	°C
	Storage temperature	T _{stg}	-40 100	°C
■	Ta=25 ELECTOR-OPTICAL CHARACTERISTICS (TA = 25			

Test schematic

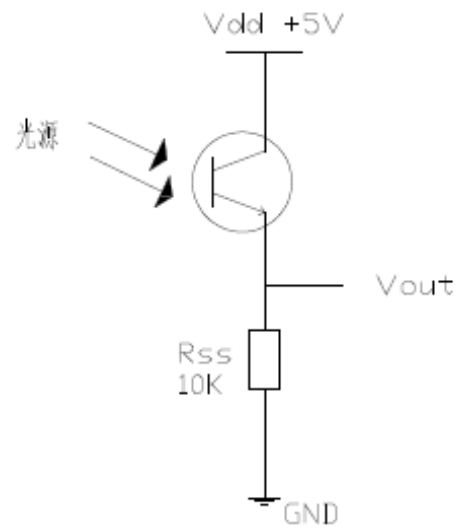

Photocurrent

Reference circuit

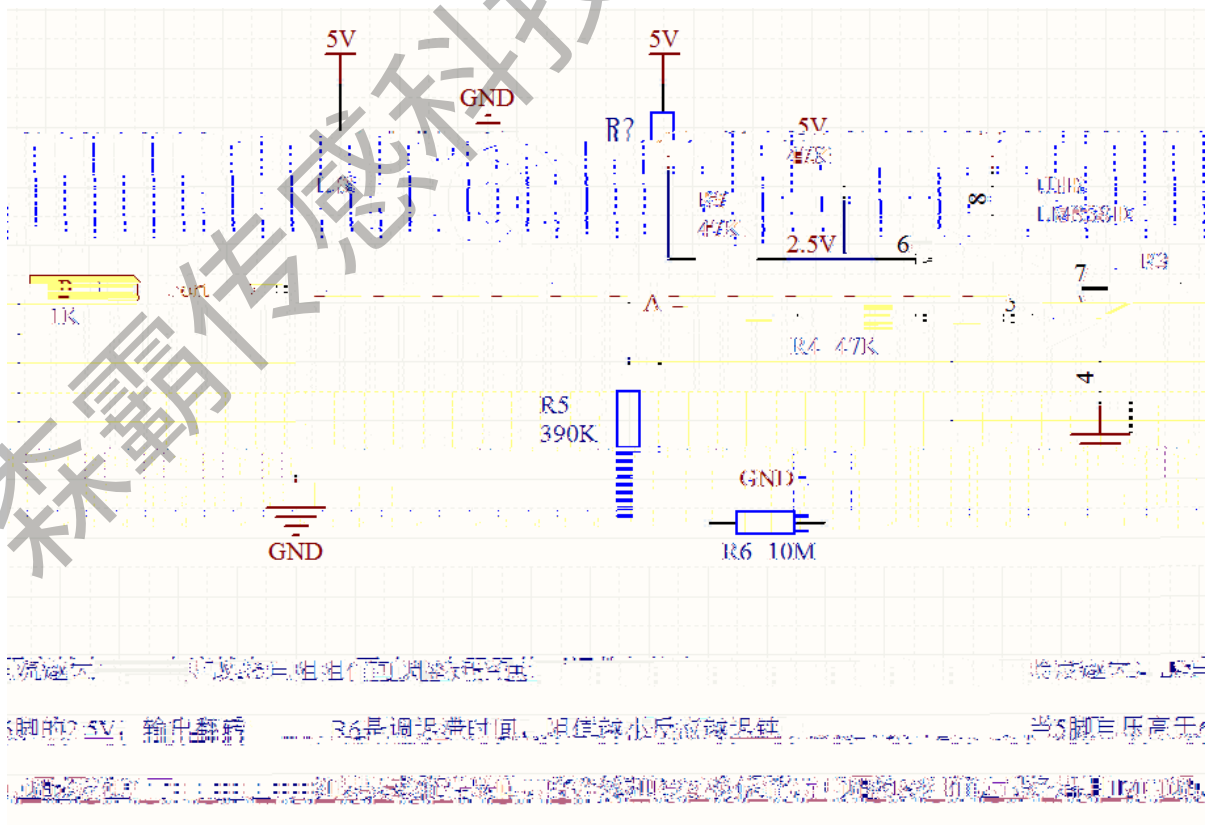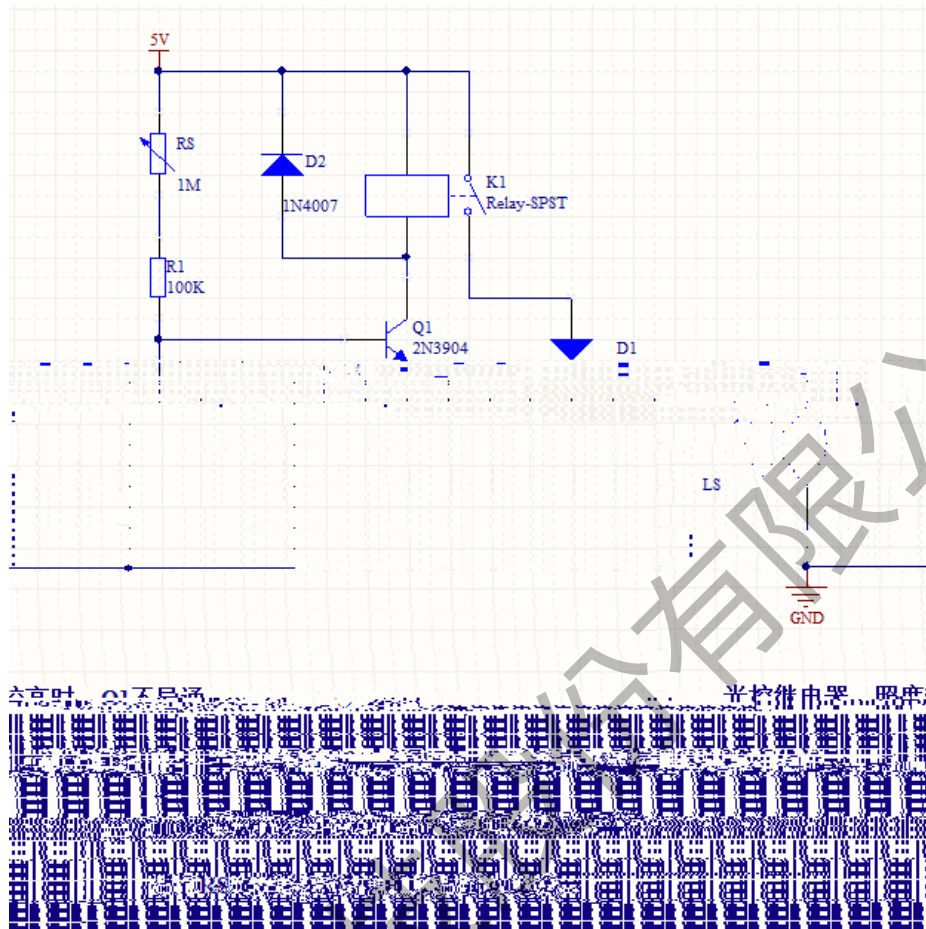

/

■ Recommended Soldering Conditions

Mode		Condition
Manually Soldering	Soldering Iron Temperature	340 60 Max340 (power:60Wmax)
	Soldering Time	3 ≤ 3 seonds
	Soldering Position	1.5mm 1.5mm Min.(Form soldering joint to colloid)
Wave Soldering	Preheat	110 80 110 Max.80 sec.Max.
	Temperature	260 ≤ 260
	Soldering Time	5 ≤ 5 seonds
	Preheat	100 60 100 Max.60 sec.Max

Solder pot Soldering

■ Precautions			
1.	0 +30°C	70%	3
The storage conditions of the product after leaving the factory shall be 0 to + 30 ° C, the relative humidity shall not be more than 70%, and the storage period shall be 3 months. If the storage period is more than 3 months, the product shall be placed in a closed container with nitrogen or desiccant, and the storage period may be up to one year			
2.			0 +30°C
Once the package is opened, the products should be used up as soon as possible . If it is not used up,It should be sealed immediately. The storage condition is 0 +30°C, and the relative humidity ≤ 60%. It should be used up within one week			
3.	5		