



● 主要特性

-
-
-
-

● 典型应用


-
-
-
-

标准规格

	LCR-0202
	DIP-4
	0—20 mA
	1.6—2.5 Vdc
	50Ω - 1KΩ @ 20mA - 0.01mA
	1Ω - 10MΩ @ 10s off later 1Ω - 10MΩ 10s
	2.5mS
	2500VRMS
	300KHz
	50V
	100dB
	5pF
	100mW
	LED
	-30—+70
	-40—+80



外形尺寸

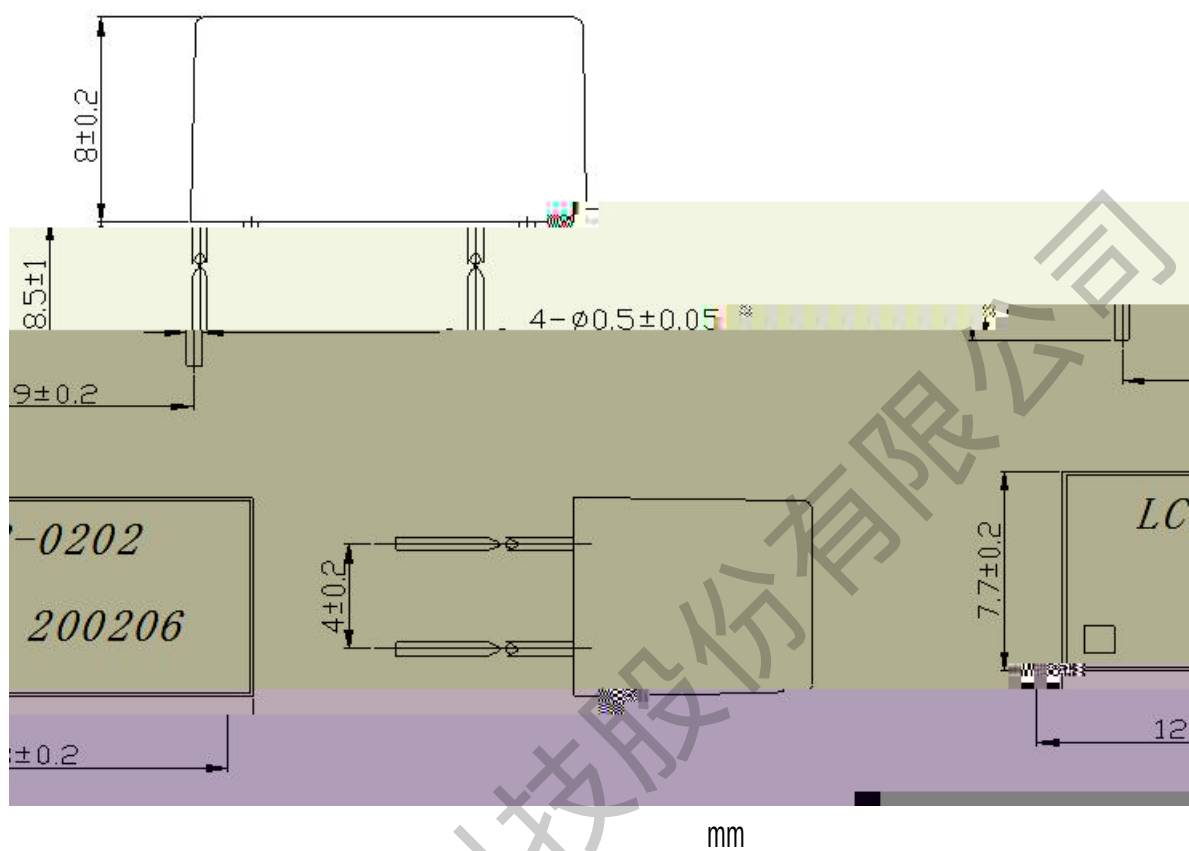

使用注意及标准包装

- $\geq 4\text{mm}$, 260 -- 280
- 3
-
- 100 3000